

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: J. MATTO ET AL.  
Serial No.: New Application  
Filed: November 6, 2001  
For: ELECTRONIC DEVICE AND METHOD OF OPERATION

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C. 20231

November 7, 2001

Sir:

The following preliminary amendments and remarks are respectfully  
submitted in connection with the above-identified application.

**IN THE SPECIFICATION AND CLAIMS:**

Please replace the original specification, Claims, Abstract and Drawings with  
the attached Substitute Specification, Claims, Abstract and Drawings.

**IN THE DRAWINGS:**

Please replace Figure 3 with the attached new Figure 3.

## REMARKS

Applicants submit herewith a Substitute Specification, Claims and Abstract, along with a marked-up copy of the original specification, Claims and Abstract for the Examiner's convenience. The substitute specification, claims and abstract include the changes as shown in the marked-up copy and include no new matter. Therefore, entry of the Substitute Specification, Claims and Abstract is respectfully requested.

By the attached, the specification has been amended to improve its form for examination.

The claims have been amended to improve their form for examination and eliminate multiple dependency.


The abstract has been amended provide an abstract in proper format.

Figure 3 has been amended to be consistent with the amendments made to the specification. A marked-up version of Figure 3 is attached herewith.

Entry of the preliminary amendments and examination of the application is respectfully requested.

Please charge any shortage in the fees due in connection with the filing of this paper, including extension of time fees, to Deposit Account No. 01-2135 (367.40816X00) and please credit any excess fees to such deposit account.

Respectfully submitted,  
ANTONELLI, TERRY, STOUT & KRAUS, LLP

  
\_\_\_\_\_  
Donald E. Stout  
Registration No. 26,422

DES:alw  
(703) 312-6600

PAT 00031 US

**ELECTRONIC DEVICE AND METHOD OF OPERATION**All  
Caps→ Background of the invention

5

This invention relates to a portable communication device, such as a portable telephone or computer, equipped with a browser application for communicating with a remote computer over a wireless network. The browser application is operable according to a standard such as WAP (Wireless Application Protocol), which is optimised for portable devices having a limited display size.

10

09/985979-110701

All  
Caps→ Summary of the Invention

15 [ According to a first aspect of the present invention, there is provided a method according to claim 1.

According to a second aspect of the present invention, there is provided a method according to claim 12.

20

According to a third aspect of the present invention, there is provided a portable wireless communication device according to claim 13.

25

According to a fourth aspect of the present invention, there is provided a portable wireless communication device according to claim 14.

According to a fifth aspect of the present invention, there is provided a method according to claim 19.

30

According to a sixth aspect of the present invention, there is provided a wireless communication network according to claim 21.

← (A) From page 2

According to a seventh aspect of the present invention, there is provided a method of operating a system according to claim 22.]

### Description of the Prior Art

5 A portable wireless communication device equipped with a browser is able to access specially optimised pages of data on a remote computer. The optimisation usually involves providing pages suitable for viewing on a small display, and for downloading via a relatively slow data connection. Hence, such pages tend to be short, and relatively lacking in graphic images when compared to pages viewable via an Internet connection. One example of such a device is a mobile telephone equipped with a WAP browser.

10 Users of portable wireless devices often have experience of using desktop computers which are equipped to access the Internet. The type of information which is accessible on the Internet is markedly different to that available using portable wireless devices. Internet pages are encoded in a different format, and can offer content that extends beyond the relatively basic textual information available on wireless devices. Also, the data connection speeds available to desktop computers can be orders of magnitude greater than those available for portable devices, and this allows the received pages to be augmented with graphic images, sounds, movies, other multimedia files and embedded applications.

20 Once a user has used a desktop system with its faster connection speeds, increased display size, richer content and improved interactivity, the data received via a portable device can seem rather basic in comparison.

25 With currently available WAP-equipped telephones, it is possible to receive a page of information, store it in the telephone, and then print it out at a convenient time. However, due to the relatively basic format of WAP pages, and their relatively small size, the printed result can seem rather unimpressive.

0995979.1

An advantage of the present invention is that once an address for further information has been received, it can be transmitted to another device capable of viewing the information in that second format. This provides  
 5 particular advantages when the device receiving the address can not display information in the second format, or can only do so to a limited extent.

The location of data at the remote server is specified in the form of an address. Each address identifies a particular collection of information. The  
 10 addresses from which data is retrieved from a remote source are preferably in the form of Uniform Resource Locators (URLs). These specify data sources according to a unified standard.

Preferably, the address received from the remote server identifying a source  
 15 of further information corresponds to a page on the Internet encoded using HTML. This may of course include other forms of encoding, such as Java applications.

The address received from the remote source may be received in isolation, or  
 20 it may be accompanied by further information for display on the portable device.

A further advantage of embodiments of the present invention is that a received item of information is able to be associated with two different sources  
 25 of information. Depending on a choice made by the user, <sup>the user</sup> he is able to either:

select an item from the received information, and elect to be re-directed to an address explicitly encoded with that displayed item; or

30 send a request to the remote source to query a database to ascertain whether there is a further address associated with the selected item, and if there is such an address, to send it to the user's telephone.

0965979-110701

5

25 Aspects of the invention are applicable to other communication standards,  
especially where physical limitations in a given device act to dictate how  
communication between the device and a remote source is effected.

← All copies

For a better understanding of the present invention, and to understand how the same may be brought into effect, the invention will now be described, by way of example only, with reference to the appended drawings in which:

5 Figure 1 shows an embodiment of a system operable to perform the invention;

Figure 2 shows a flowchart describing the basic mode of operation of embodiments of the invention;

10 Figure 3 shows a flowchart similar to Figure 1, describing a specific use of an embodiment of the invention; and

Figure 4 shows a series of display screens from a portable device.

15 Detailed description of the invention

*Preferred Embodiments of* ← *All refer*

Figure 1 shows an overview of the typical components involved in a WAP system according to embodiments of the invention. The WAP enabled telephone 10 is the user's means of obtaining data from a remote WAP server 50. The WAP server 50 hosts one or more pages of encoded information suitable for transmission to a WAP enabled telephone. The WAP server 50 is connected via a communication network 40 to a Base Transceiver Station (BTS) 30. The communication network can be a fixed line network, a mobile network, or a mixture of the two.

25

The BTS 30 is ultimately responsible for transmitting WAP pages to the telephone 10. The BTS forms part of a mobile communication network and may operate according to one or more communication standards such as GSM, CDMA or PDC. The BTS is also responsible for receiving WAP messages from the telephone 10. The BTS is in fact responsible for all voice and text communication between the telephone 10 and the network 40.

30

09985979.110701

The telephone 10 of this system is equipped with circuitry to make use of the Global Positioning System (GPS). This system takes readings from a constellation of satellites to accurately calculate the latitude and longitude of a suitably equipped device. In Figure 1, a single satellite 20 is shown, but in reality, to calculate position, the device must receive signals from three satellites. This particular facility is not essential for the operation of embodiments of the invention, but provides a useful function if available.

The telephone 10 is further supplied with a transmitter to enable it to communicate with other devices such as Personal Computers 60, or other mobile devices. The transmitter may also comprise a corresponding receiver to facilitate two-way communication.

The computer 60 is connected to a printer 70 to enable hard copies of data to be produced.

Figure 2 shows a flowchart detailing the basic operation of embodiments of the invention. Starting at 100, the user initiates access to a remote WAP server via the menu functions of his mobile telephone. Once in WAP mode, the user can select a site <sup>the user's</sup> ~~he~~ wishes to visit so that the remote WAP server can transmit 110 to him <sup>the user</sup> ~~he~~ the information he has requested.

The data received from the remote WAP server is typically quite limited, and may not offer all the information that the user requires. If the user wishes to learn more about a particular topic or issue on the received page of data, <sup>the user</sup> ~~the user~~ can select that topic and, from a menu option, requests more information on that topic 120. That further information is in the form of a URL for a page on the WWW or Internet.

The WAP server then checks 130 to see whether the user's selected topic has a URL associated with it which provides further information.



If no URL is registered for the particular topic selected, then the user is informed that no more information is available 170.

- 5 If, on the other hand, a further URL is associated with the selected topic, then that URL is transmitted 140 to the user, and stored in the user's telephone. As an alternative, the transmitted URL may be stored in the user's SIM card or some other removable memory module.

- 10 The association of a further URL with the selected topic is performed by the provider of the information at the WAP site. The information provider may be in the business of providing information relating to a particular topic, and may provide the further URL as a value-added service for <sup>the</sup> ~~his~~ customers or subscribers.

- 15 ☒ Alternatively, an individual may have a personal page hosted on a WAP server, and <sup>the user</sup> ~~he~~ may wish to use this page to direct users to <sup>his</sup> ~~his~~ regular page on the WWW. In that case, <sup>the user</sup> ~~he~~ may set up <sup>the</sup> ~~his~~ WAP page with the addition of the further URL which can point those interested to <sup>the</sup> ~~his~~ WWW page.

- 20 Once the user has access to a device, such as a desktop PC, which is better suited to accessing the stored URL received from the WAP server, <sup>the user</sup> ~~the user~~ can transmit 150 the URL to that device. The transmission may be achieved through use of a wired link, a wireless link such as BlueTooth or an Infra Red link such as IrDA.

- 25 The desktop PC can then retrieve the page of data from the URL in the customary manner, <sup>the user</sup> ~~using~~ a browser application. The user can then view this information, save it <sup>if the user</sup> ~~if the user~~ wishes, and print it to a suitable printer.

- 30 Another option is for the user to transmit the URL to a suitably connected printer, which can access the information at that URL and print <sup>the information</sup> ~~it~~ directly for the user without the intermediate step of viewing it on a display. Such a

suitably equipped printer may be one that is connected to a Local Area Network (LAN).

5 A more specific illustrative example is given in Figure 3. In this example, the user has a portable WAP-enabled telephone which also has a built-in positioning system. A suitable positioning system is GPS (Global Positioning System). With this system, a user's position can be calculated to the nearest 10 metres.

10 Suppose ~~the~~ <sup>the user</sup> user is travelling away from home, and whilst out walking away from ~~his~~ <sup>the user's</sup> hotel, ~~he~~ <sup>the user</sup> decides to investigate what restaurants are available in the locality 200. Using ~~his~~ <sup>the user's</sup> GPS-equipped WAP telephone, ~~he~~ <sup>the user</sup> can select a WAP site which will send ~~him~~ <sup>the user</sup> 210 a list of restaurants within a given radius of ~~his~~ <sup>the user's</sup> current location, as calculated using GPS. If ~~his~~ <sup>the user's</sup> telephone is not supplied with

15 the GPS service, alternatives are available: the telephone can determine the approximate position by knowing to which BTS it is currently connected; the user can be prompted to input the name of the town; or the user can be prompted to input a postal/ZIP code.

20 However, due to the limited information available via WAP, ~~he~~ <sup>the user</sup> will probably only receive from the remote server the names, physical addresses and perhaps typical prices of nearby restaurants. Perhaps being ~~something~~ <sup>the user</sup> of a connoisseur, this is not enough information for the user, and ~~he~~ <sup>the user</sup> decides that

25 ~~he~~ <sup>the user</sup> would like some more information on one or two of the restaurants identified in the received list.

To do this, ~~he~~ <sup>the user</sup> highlights a particular restaurant in the received list, and using the telephone's menu functions, selects a "More Info" or "Get URL" option

30 220. This action causes a request to be transmitted to the remote WAP server which supplied the original list.

In addition to the "More Info" or "Get URL" option described above, the user may be presented with other options. One such alternative may be "Go To" or "Select". If the user chooses such an option, <sup>the user</sup> ~~he~~ will be directed towards another address, as is known from prior art implementations.

5

This is in contrast to the previously described option where the user will receive a transmission from the WAP server comprising a URL for a different site, intended to be visited at a later time using a different device. Of course, the transmission from the WAP server may also contain additional information  
10 as well as just the URL.

It is to be noted that when the user chooses the 'Select' option, <sup>the user</sup> ~~the~~ is requesting a direct download of the information stored at the address which is encoded with the link description viewed on the display. The address to which  
15 ~~the~~ <sup>the user</sup> will be transferred is thus already in the telephone's memory.

However, when <sup>the user</sup> ~~the~~ chooses the 'Get URL' option, a request is sent to the WAP server to query a database to ascertain whether there is a URL associated with the selected item. If there is an associated URL, then the URL  
20 is sent to the user. The user is not re-directed to the URL, as the intention is that <sup>the user</sup> ~~the~~ will view the information located at the stored URL at a later date with another device.

When the WAP server receives the request, it checks 230 to determine  
25 whether any more information in the form of a URL is available for the selected restaurant.

If no further information is available, the WAP server sends an appropriate message to the user. <sup>The user</sup> ~~He~~ is then able to try again with a different restaurant if  
30 <sup>the user</sup> ~~he~~ so chooses.

0985979-110701

If, however, more information is available, then the WAP server responds by sending 140 to the user's phone a URL from which further information may be obtained. The URL may be sent alone, or it may be accompanied by further information for display on the device. The URL is then stored in the user's telephone, or as mentioned previously, in a removable memory device such as a SIM card. In this example, if the restaurant has a website on the Internet, its URL may be transmitted to the user.

Once the user has obtained more information on as many restaurants as he wishes, <sup>the user</sup> he can return to <sup>the</sup> his hotel, where <sup>the user</sup> he can use <sup>his</sup> his laptop computer and a regular telephone line to visit the received URLs, taking advantage of the laptop computer's better display capabilities and the increased data rate achievable using a fixed telephone line.

In order to transfer the URL from <sup>the</sup> his mobile telephone, the user transmits 250 it using one of a number of possible transmission standards as previously described. The transmission is initiated using a menu function which allows the user to pick one of possibly many stored URLs for transmission. Which method of transmission is used is a matter of preference, and of which method(s) the portable telephone and laptop computer support.

The transmission to the laptop computer may be formatted so that the laptop computer is informed of the nature of the message, and so knows to open an Internet browser application such as Netscape Navigator or Microsoft Internet Explorer, to receive the incoming URL.

Using the Internet browser application, the user is able to browse the web pages for ~~his~~ chosen restaurant 260, and if so formatted, may be able to view that evening's menu, read reviews of the restaurant, examine photographs of the restaurant and it's food, and email the proprietor to book a table for dinner. Of course, if ~~he~~ <sup>the user</sup> has access to a printer, <sup>the user</sup> he can create a hard copy of the web pages for future reference.

Figure 4 shows how the display of the telephone appears to the user during the process of choosing a restaurant, used to exemplify the invention.

- 5 The display of Figure 4a shows a list of restaurants located in the vicinity of the user in response to ~~his~~ requesting such a list from a WAP server, as in step 200 of Figure 3.

10 The user decides that option number 5 sounds interesting, and so at Figure 4b, ~~he~~ <sup>the user</sup> highlights that option using the telephone's keypad controls, and operates the key positioned beneath the 'Options' Label. It is noted that the two labels shown at the bottom of each display define the operation of keys situated immediately beneath the labels. Such keys are normally called softkeys.

15 In response to the operation of the 'Options' softkey, a list of possible options is presented to the user as shown in Figure 4c. By choosing the 'Select' option, ~~he~~ <sup>the user</sup> may be taken to a further page of information related to ~~his~~ <sup>the</sup> selected restaurant. The location or address of that further page of information is encoded along with the displayed information on the telephone's display. Such information may include the restaurant's physical address and telephone number. However, due to the limitations of the WAP service, such information will necessarily be limited.

25 Other options available include: 'Back', which will return the user to the previous screen; 'Home', which will take the user to ~~his~~ <sup>the user's</sup> previously defined home page; 'Reload', which will refresh the information on the current page by requesting a retransmission from the WAP server; and 'Exit', which will quit the browsing function.

30 However, the user chooses the 'Get URL' option using the keypad and the appropriate softkey, as shown in Figure 4d. Choosing this option causes a

request to be transmitted to the WAP server to check whether an address for further information is available for the selected item. In this case, a further URL is available, and so the user is informed via a message as shown in Figure 4e.

5

By operating the 'Options' key as shown in Figure 4e, a menu as shown in Figure 4f is displayed. This menu offers the user the choices of: 'Save', which will cause the received URL to be stored in the telephone for later use; 'Discard', which will delete the received URL from the telephone's memory; or

10 'View', which will display the URL on the display.

As shown in Figure 4g, the user chooses to save the URL for future use.

A message is displayed, as shown in Figure 4h, to confirm that the URL has been stored.

15

Of course, the embodiment described above is only exemplary, and the same method, techniques and apparatus can be applied to any number of different situations where a limited amount of information arouses the interest of the user.

20

To understand more fully, it is instructive to understand something of the way in which WAP pages are constructed. WAP Pages comprise decks of cards, as known in the art. WAP pages are formatted using Wireless Markup Language (WML), which is a variant of XML (Extensible Markup Language). This is in contrast to WWW pages, which are formatted using Hyper Text Markup Language (HTML) which is also a markup language, but it doesn't follow the strict rules laid down to qualify as a variant of XML.

25

HTML pages are not compatible with WML pages and so may not be viewed on a browser configured to view WML pages and vice-versa.

30

When a user requests a WAP page from his browser, a request is sent via the network to the relevant WAP server. The server responds by transmitting to the user, via the network, data which is interpreted by the browser. The interpretation by the browser is controlled by the markup tags applied to the data. These tags are textual labels applied to the raw data to control the way in which the data is presented on the telephone's display. They can, for instance, define sections of text to appear in a bold typeface or underlined. They are also used to define additional options related to the received page. In this way, a tag can be introduced and associated with a given item on the received page of information, in such a way that once the user selects that item using the cursor keys, *he is* presented with a list of further options. One such option in this case may be titled "More Information", "Get URL" or similar. By selecting this option, a request is sent to the WAP server as previously described.

Although this invention has been described in terms of its applicability to telephones functioning according to the WAP standard, it is equally applicable to telephones and other devices operating according to other standards, particularly, but not limited to, telephones using the i-mode system used especially in Japan.

The present invention includes any novel feature or combination of features disclosed herein either explicitly or any generalisation thereof irrespective of whether or not it relates to the claimed invention or mitigates any or all of the problems addressed.

What is claimed is

5

- 10

20

25

30

at least



6. A method as claimed in claim 1, wherein the address is a Uniform Resource Locator (URL).

7. A method as claimed in claim 1, wherein the address corresponds to a source of information encoded using Hyper Text Markup Language (HTML).

8. A method as claimed in claim 1, wherein the address is accompanied by other data.

9. A method as claimed in claim 1, wherein the step of transmitting the request and the step of transmitting the address each use a different transmitter.

10. A method as claimed in claim 9 wherein the step of transmitting the address is achieved using one of a wired connection, an Infra-Red (IrDA) connection or a low-powered radio connection, such as BlueTooth.

11. A method of operating a portable wireless communication device operable to access a remote source of information, comprising the steps of:

- receiving information from the remote source at a first address;
- selecting an item of received information; *and*
- requesting information from one of two addresses associated with the selected item.

12. A method as claimed in claim 11 wherein one of the addresses is encoded in the received information.

13. A portable wireless communication device operable to access a remote source of information, comprising:

- 5     a receiver for receiving information from the remote source at a first address;  
      means for selecting an item of information; *W*  
      means for requesting information from one of two addresses associated with the selected item.

14.    A portable wireless communication device operable to access a remote source of information, and capable of viewing information encoded in a first format comprising:

- 10     a receiver for receiving information from the remote source;  
      means for selecting an item of information;  
      a transmitter for transmitting to the remote source, a request for an address associated with the selected item of information, said address  
      corresponding to a source of further information on the selected item and  
      said further information being encoded in a second format;  
      a receiver for receiving from the remote source the address in response to  
      the request; *W*  
      a transmitter for transmitting the received address to another device  
      capable of viewing information in the second format.

15.    A portable wireless communication device as claimed in ~~any one of~~ claims 13 ~~or~~ 14 wherein the device is operable according to the Wireless Application Protocol (WAP) Communication standard.

25

16.    A portable wireless communication device as claimed in claim 14 wherein the device comprises two transmitters.

17.    A portable communication device as claimed in claim 16 wherein a  
      transmitter is operable to communicate with a wireless communication  
      network.

30

09985979 140701

18. A portable communication device as claimed in claim 16 wherein a transmitter is operable to communicate with another local device.

19. A method of operating a wireless communication network operable to communicate with a portable wireless communication device, comprising the steps of:

- storing items of information;
- associating with each item of stored information, a respective address for retrieving additional information;
- 10 ▪ transmitting to the wireless communication device, information comprising an item selected from the stored items of information;
- receiving from the wireless communication device, a request for further information on a selected item of information; and
- 15 ▪ transmitting to the device, in response to the request, the address for retrieving additional information associated with the selected item.

20. A method as claimed in claim 19 wherein the first step of transmitting to the wireless communication device is performed in response to a request.

21. A wireless communication network operable to communicate with a portable wireless communication device comprising:

- a store for storing items of information;
- means for associating with each item of stored information, a respective address for retrieving additional information;
- 25 ▪ a transmitter for transmitting to the wireless communication device, information comprising an item selected from the stored items of information;
- a receiver for receiving from the wireless communication device, a request for further information on a selected item of information; and
- 30 ▪ a transmitter for transmitting to the device, in response to the request, the address for retrieving additional information associated with the selected item.

0995979 110701

22. A method of operating a system comprising a wireless communication network and a plurality of portable wireless communication devices, comprising the steps of:

5

- the network transmitting information to a portable device;
- the portable device transmitting, to the network, a request for an address from which more information, related to a selected received item of information, may be obtained;
- 10 ▪ the network retrieving the address from a data store in response to the request;
- the network transmitting the address to the portable device; *and*
- the portable device storing the address for future transmission to another device.

15

23. A method as claimed in claim 22 wherein the network and portable device are operable according to the Wireless Application Protocol (WAP) communication standard.

20 24. A method as claimed in claim 23 wherein the data store is a WAP server.

25 15 14

0985979-140704

## 5

10

~~Figure. 1~~

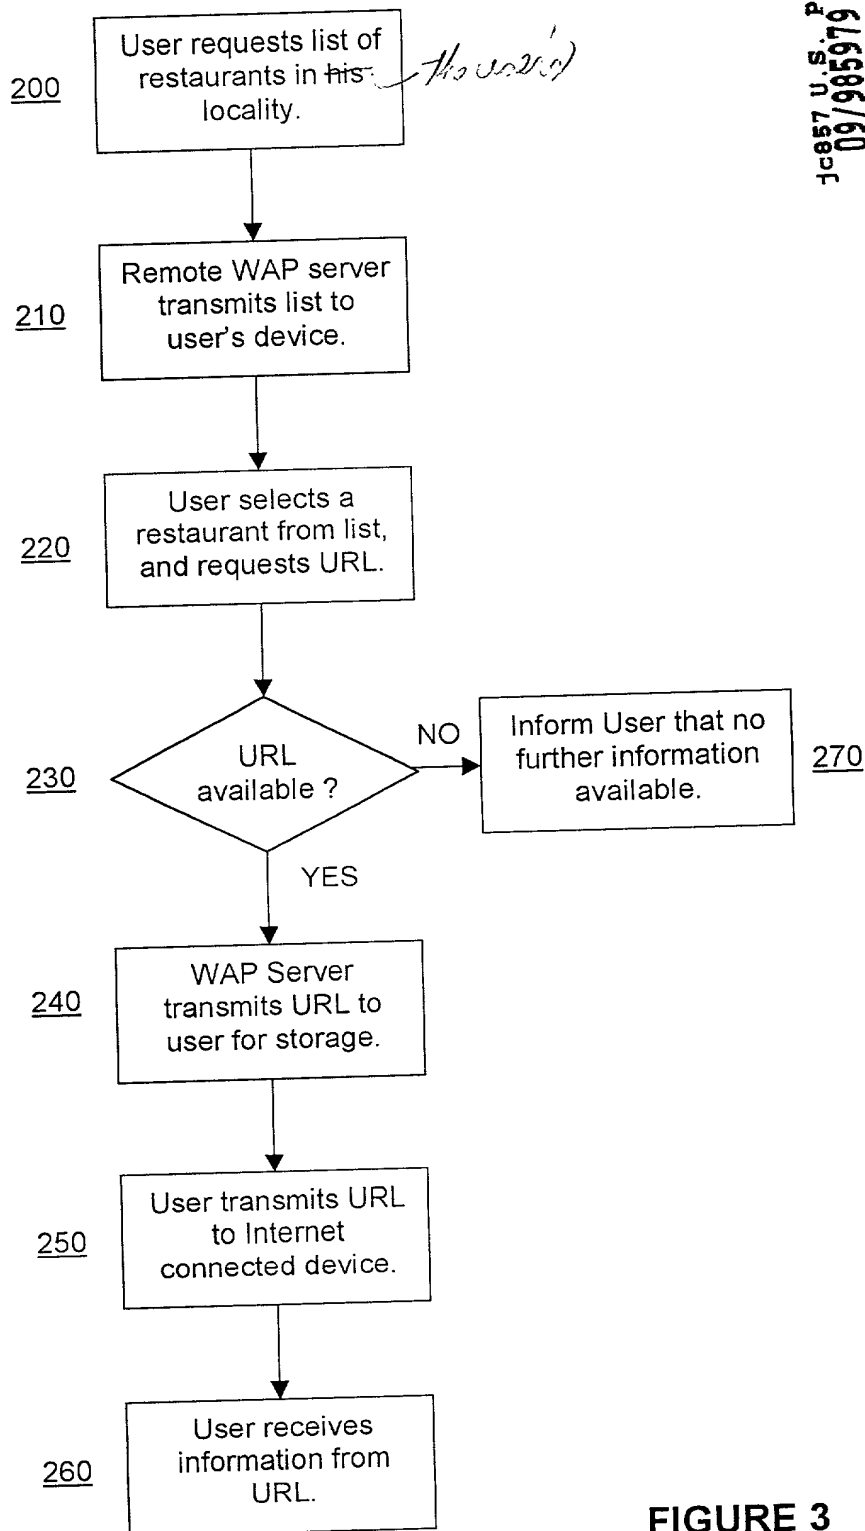


FIGURE 3

**ELECTRONIC DEVICE AND METHOD OF OPERATION**BACKGROUND OF THE INVENTION

5

This invention relates to a portable communication device, such as a portable telephone or computer, equipped with a browser application for communicating with a remote computer over a wireless network. The browser application is operable according to a standard such as WAP (Wireless Application Protocol), which is optimised for portable devices having a limited display size.

A portable wireless communication device equipped with a browser is able to access specially optimised pages of data on a remote computer. The optimisation usually involves providing pages suitable for viewing on a small display, and for downloading via a relatively slow data connection. Hence, such pages tend to be short, and relatively lacking in graphic images when compared to pages viewable via an Internet connection. One example of such a device is a mobile telephone equipped with a WAP browser.

20

Users of portable wireless devices often have experience of using desktop computers which are equipped to access the Internet. The type of information which is accessible on the Internet is markedly different to that available using portable wireless devices. Internet pages are encoded in a different format, and can offer content that extends beyond the relatively basic textual information available on wireless devices. Also, the data connection speeds available to desktop computers can be orders of magnitude greater than those available for portable devices, and this allows the received pages to be augmented with graphic images, sounds, movies, other multimedia files and embedded applications.

30

0995979.43704

Once a user has used a desktop system with its faster connection speeds, increased display size, richer content and improved interactivity, the data received via a portable device can seem rather basic in comparison.

- 5 With currently available WAP-equipped telephones, it is possible to receive a page of information, store it in the telephone, and then print it out at a convenient time. However, due to the relatively basic format of WAP pages, and their relatively small size, the printed result can seem rather unimpressive.

10

### SUMMARY OF THE INVENTION

- 15 An advantage of the present invention is that once an address for further information has been received, it can be transmitted to another device capable of viewing the information in that second format. This provides particular advantages when the device receiving the address can not display information in the second format, or can only do so to a limited extent.

- 20 The location of data at the remote server is specified in the form of an address. Each address identifies a particular collection of information. The addresses from which data is retrieved from a remote source are preferably in the form of Uniform Resource Locators (URLs). These specify data sources according to a unified standard.

- 25 Preferably, the address received from the remote server identifying a source of further information corresponds to a page on the Internet encoded using HTML. This may of course include other forms of encoding, such as Java applications.



The address received from the remote source may be received in isolation, or it may be accompanied by further information for display on the portable device.

5 A further advantage of embodiments of the present invention is that a received item of information is able to be associated with two different sources of information. Depending on a choice made by the user, the user is able to either:

10 select an item from the received information, and elect to be re-directed to an address explicitly encoded with that displayed item; or

send a request to the remote source to query a database to ascertain whether there is a further address associated with the selected item, and if there is  
15 such an address, to send it to the user's telephone.

The address may be sent to the user as part of the WAP messaging between the network and the telephone, or by some other means such as a short message using Short Message Service (SMS).

20 An advantage of operating a system according to aspects of the invention is that an information provider can provide differing degrees of information depending on the intended viewing device. Someone using a WAP-equipped portable device can be offered a subset of the full information available via an  
25 Internet website. However, the user of the portable device is easily able to discover, from the WAP site, information revealing to the user the source of further information viewable from a suitably connected device.

Advantageously, the invention can be applied to other wireless browsing  
30 standards as well as WAP. Specifically, embodiments of the invention operable according the Japanese i-mode standard are envisaged.

5

10

### BRIEF DESCRIPTION OF THE DRAWINGS

15

20

25

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

Figure 1 shows an overview of the typical components involved in a WAP system according to embodiments of the invention. The WAP enabled telephone 10 is the user's means of obtaining data from a remote WAP server 50. The WAP server 50 hosts one or more pages of encoded information suitable for transmission to a WAP enabled telephone. The WAP server 50 is connected via a communication network 40 to a Base Transceiver Station (BTS) 30. The communication network can be a fixed line network, a mobile network, or a mixture of the two.

The BTS 30 is ultimately responsible for transmitting WAP pages to the telephone 10. The BTS forms part of a mobile communication network and may operate according to one or more communication standards such as GSM, CDMA or PDC. The BTS is also responsible for receiving WAP messages from the telephone 10. The BTS is in fact responsible for all voice and text communication between the telephone 10 and the network 40.

The telephone 10 of this system is equipped with circuitry to make use of the Global Positioning System (GPS). This system takes readings from a constellation of satellites to accurately calculate the latitude and longitude of a suitably equipped device. In Figure 1, a single satellite 20 is shown, but in reality, to calculate position, the device must receive signals from three satellites. This particular facility is not essential for the operation of embodiments of the invention, but provides a useful function if available.

The telephone 10 is further supplied with a transmitter to enable it to communicate with other devices such as Personal Computers 60, or other mobile devices. The transmitter may also comprise a corresponding receiver to facilitate two-way communication.

The computer 60 is connected to a printer 70 to enable hard copies of data to be produced.

- 5 Figure 2 shows a flowchart detailing the basic operation of embodiments of the invention. Starting at 100, the user initiates access to a remote WAP server via the menu functions of the user's mobile telephone. Once in WAP mode, the user can select a site the user wishes to visit so that the remote WAP server can transmit 110 to the user the information the user has  
10 requested.

- The data received from the remote WAP server is typically quite limited, and may not offer all the information that the user requires. If the user wishes to learn more about a particular topic or issue on the received page of data, the  
15 user can select that topic and, from a menu option, requests more information on that topic 120. That further information is in the form of a URL for a page on the WWW or Internet.

- The WAP server then checks 130 to see whether the user's selected topic  
20 has a URL associated with it which provides further information.

If no URL is registered for the particular topic selected, then the user is informed that no more information is available 170.

- 25 If, on the other hand, a further URL is associated with the selected topic, then that URL is transmitted 140 to the user, and stored in the user's telephone. As an alternative, the transmitted URL may be stored in the user's SIM card or some other removable memory module.

- 30 The association of a further URL with the selected topic is performed by the provider of the information at the WAP site. The information provider may be

in the business of providing information relating to a particular topic, and may provide the further URL as a value-added service for the user's customers or subscribers.

- 5 Alternatively, an individual may have a personal page hosted on a WAP server, and the user may wish to use this page to direct users to his or her regular page on the WWW. In that case, the user may set up the WAP page with the addition of the further URL which can point those interested to the WWW page.

10

Once the user has access to a device, such as a desktop PC, which is better suited to accessing the stored URL received from the WAP server, the user can transmit the URL to that device. The transmission may be achieved through use of a wired link, a wireless link such as BlueTooth or an Infra Red link such as IrDA.

15

The desktop PC can then retrieve the page of data from the URL in the customary manner, using a browser application. The user can then view this information, save it if the user wishes, and print it to a suitable printer.

20

Another option is for the user to transmit the URL to a suitably connected printer, which can access the information at that URL and print the information directly for the user without the intermediate step of viewing it on a display. Such a suitably equipped printer may be one that is connected to a Local Area Network (LAN).

25

- 30 A more specific illustrative example is given in Figure 3. In this example, the user has a portable WAP-enabled telephone which also has a built-in positioning system. A suitable positioning system is GPS (Global Positioning System). With this system, a user's position can be calculated to the nearest 10 metres.

Suppose the user is travelling away from home, and whilst out walking away from the user's hotel, the user decides to investigate what restaurants are available in the locality 200. Using the user's GPS-equipped WAP telephone, 5 the user can select a WAP site which will send him 210 a list of restaurants within a given radius of the user's current location, as calculated using GPS. If the user's telephone is not supplied with the GPS service, alternatives are available: the telephone can determine the approximate position by knowing to which BTS it is currently connected; the user can be prompted to input the 10 name of the town; or the user can be prompted to input a postal/ZIP code.

However, due to the limited information available via WAP, the user will probably only receive from the remote server the names, physical addresses and perhaps typical prices of nearby restaurants. Perhaps being something of 15 a connoisseur, this is not enough information for the user, and the user decides that the user would like some more information on one or two of the restaurants identified in the received list.

To do this, the user highlights a particular restaurant in the received list, and 20 using the telephone's menu functions, selects a "More Info" or "Get URL" option 220. This action causes a request to be transmitted to the remote WAP server which supplied the original list.

In addition to the "More Info" or "Get URL" option described above, the user 25 may be presented with other options. One such alternative may be "Go To" or "Select". If the user chooses such an option, the user will be directed towards another address, as is known from prior art implementations.

This is in contrast to the previously described option where the user will 30 receive a transmission from the WAP server comprising a URL for a different site, intended to be visited at a later time using a different device. Of course,

the transmission from the WAP server may also contain additional information as well as just the URL.

It is to be noted that when the user chooses the 'Select' option, the user is requesting a direct download of the information stored at the address which is encoded with the link description viewed on the display. The address to which the user will be transferred is thus already in the telephone's memory.

However, when the user chooses the 'Get URL' option, a request is sent to the WAP server to query a database to ascertain whether there is a URL associated with the selected item. If there is an associated URL, then the URL is sent to the user. The user is not re-directed to the URL, as the intention is that the user will view the information located at the stored URL at a later date with another device.

When the WAP server receives the request, it checks 230 to determine whether any more information in the form of a URL is available for the selected restaurant.

If no further information is available, the WAP server sends an appropriate message to the user. The user is then able to try again with a different restaurant if the user so chooses.

If, however, more information is available, then the WAP server responds by sending 140 to the user's phone a URL from which further information may be obtained. The URL may be sent alone, or it may be accompanied by further information for display on the device. The URL is then stored in the user's telephone, or as mentioned previously, in a removable memory device such as a SIM card. In this example, if the restaurant has a website on the Internet, its URL may be transmitted to the user.

Once the user has obtained more information on as many restaurants as the user wishes, the user can return to the hotel, where the user can use a laptop computer and a regular telephone line to visit the received URLs, taking advantage of the laptop computer's better display capabilities and the increased data rate achievable using a fixed telephone line.

In order to transfer the URL from the mobile telephone, the user transmits it using one of a number of possible transmission standards as previously described. The transmission is initiated using a menu function which allows the user to pick one of possibly many stored URLs for transmission. Which method of transmission is used is a matter of preference, and of which method(s) the portable telephone and laptop computer support.

The transmission to the laptop computer may be formatted so that the laptop computer is informed of the nature of the message, and so knows to open an Internet browser application such as Netscape Navigator or Microsoft Internet Explorer, to receive the incoming URL.

Using the Internet browser application, the user is able to browse the web pages for the user's chosen restaurant, and if so formatted, may be able to view that evening's menu, read reviews of the restaurant, examine photographs of the restaurant and its food, and email the proprietor to book a table for dinner. Of course, if the user has access to a printer, the user can create a hard copy of the web pages for future reference.

Figure 4 shows how the display of the telephone appears to the user during the process of choosing a restaurant, used to exemplify the invention.

The display of Figure 4a shows a list of restaurants located in the vicinity of the user in response to requesting such a list from a WAP server, as in step 200 of Figure 3.



The user decides that option number 5 sounds interesting, and so at Figure 4b, the user highlights that option using the telephone's keypad controls, and operates the key positioned beneath the 'Options' Label. It is noted that the  
5 two labels shown at the bottom of each display define the operation of keys situated immediately beneath the labels. Such keys are normally called softkeys.

In response to the operation of the 'Options' softkey, a list of possible options  
10 is presented to the user as shown in Figure 4c. By choosing the 'Select' option, the user may be taken to a further page of information related to the selected restaurant. The location or address of that further page of information is encoded along with the displayed information on the telephone's display. Such information may include the restaurant's physical  
15 address and telephone number. However, due to the limitations of the WAP service, such information will necessarily be limited.

Other options available include: 'Back', which will return the user to the previous screen; 'Home', which will take the user to the user's previously  
20 defined home page; 'Reload', which will refresh the information on the current page by requesting a retransmission from the WAP server; and 'Exit', which will quit the browsing function.

However, the user chooses the 'Get URL' option using the keypad and the  
25 appropriate softkey, as shown in Figure 4d. Choosing this option causes a request to be transmitted to the WAP server to check whether an address for further information is available for the selected item. In this case, a further URL is available, and so the user is informed via a message as shown in Figure 4e.

30

By operating the 'Options' key as shown in Figure 4e, a menu as shown in Figure 4f is displayed. This menu offers the user the choices of: 'Save', which will cause the received URL to be stored in the telephone for later use; 'Discard', which will delete the received URL from the telephone's memory; or  
5 'View', which will display the URL on the display.

As shown in Figure 4g, the user chooses to save the URL for future use.

A message is displayed, as shown in Figure 4h, to confirm that the URL has  
10 been stored.

Of course, the embodiment described above is only exemplary, and the same method, techniques and apparatus can be applied to any number of different situations where a limited amount of information arouses the interest of the  
15 user.

To understand more fully, it is instructive to understand something of the way in which WAP pages are constructed. WAP Pages comprise decks of cards, as known in the art. WAP pages are formatted using Wireless Markup  
20 Language (WML), which is a variant of XML (Extensible Markup Language). This is in contrast to WWW pages, which are formatted using Hyper Text Markup Language (HTML) which is also a markup language, but it doesn't follow the strict rules laid down to qualify as a variant of XML.

25 HTML pages are not compatible with WML pages and so may not be viewed on a browser configured to view WML pages and vice-versa.

When a user requests a WAP page from the user's browser, a request is sent via the network to the relevant WAP server. The server responds by  
30 transmitting to the user, via the network, data which is interpreted by the browser. The interpretation by the browser is controlled by the markup tags

5

10

15

20

What is claimed is

1. A method of operating a portable wireless communication device operable to access a remote source of information, and capable of viewing information encoded in a first format, comprising the steps of:

receiving information from the remote source;

selecting an item of information;

transmitting to the remote source, a request for an address associated with the selected item of information, said address corresponding to a source of further information on the selected item and said further information being encoded in a second format;

receiving from the remote source the address in response to the request; and

transmitting the received address to another device capable of viewing information in the second format.

2. A method as claimed in claim 1 wherein the wireless communication device is operable according to the Wireless Application Protocol (WAP) communication standard.

3. A method as claimed in claim 2 wherein the received information is encoded using Wireless Markup Language (WML).

4. A method as claimed in claim 1 wherein the wireless communication device is operable according to the i-mode standard.

5. A method as claimed in claim 1, wherein the selection of an item on the received page of information is achieved using at least one key on a keypad.

6. A method as claimed in claim 1, wherein the address is a Uniform Resource Locator (URL).
7. A method as claimed in claim 1, wherein the address corresponds to a source of information encoded using Hyper Text Markup Language (HTML).
8. A method as claimed in claim 1, wherein the address is accompanied by other data.
9. A method as claimed in claim 1, wherein the step of transmitting the request and the step of transmitting the address each use a different transmitter.
10. A method as claimed in claim 9 wherein the step of transmitting the address is achieved using one of a wired connection, an Infra-Red (IrDA) connection or a low-powered radio connection, such as BlueTooth.
11. A method of operating a portable wireless communication device operable to access a remote source of information, comprising the steps of:
  - receiving information from the remote source at a first address;
  - selecting an item of received information; and
  - requesting information from one of two addresses associated with the selected item.
12. A method as claimed in claim 11 wherein one of the addresses is encoded in the received information.
13. A portable wireless communication device operable to access a remote source of information, comprising:

a receiver for receiving information from the remote source at a first address;

means for selecting an item of information; and

means for requesting information from one of two addresses associated with the selected item.

14. A portable wireless communication device operable to access a remote source of information, and capable of viewing information encoded in a first format comprising:

a receiver for receiving information from the remote source;

means for selecting an item of information;

a transmitter for transmitting to the remote source, a request for an address associated with the selected item of information, said address corresponding to a source of further information on the selected item and said further information being encoded in a second format;

a receiver for receiving from the remote source the address in response to the request; and

a transmitter for transmitting the received address to another device capable of viewing information in the second format.

15. A portable wireless communication device as claimed in claim 13 wherein the device is operable according to the Wireless Application Protocol (WAP) Communication standard.

16. A portable wireless communication device as claimed in claim 14 wherein the device comprises two transmitters.

17. A portable communication device as claimed in claim 16 wherein a transmitter is operable to communicate with a wireless communication network.

18. A portable communication device as claimed in claim 16 wherein a transmitter is operable to communicate with another local device.

22. A method of operating a system comprising a wireless communication network and a plurality of portable wireless communication devices, comprising the steps of:

the network transmitting information to a portable device;

the portable device transmitting, to the network, a request for an address from which more information, related to a selected received item of information, may be obtained;

the network retrieving the address from a data store in response to the request;

the network transmitting the address to the portable device; and

the portable device storing the address for future transmission to another device.

23. A method as claimed in claim 22 wherein the network and portable device are operable according to the Wireless Application Protocol (WAP) communication standard.

24. A method as claimed in claim 23 wherein the data store is a WAP server.

25. A portable wireless communication device as claimed in claim 14 wherein the device is operable according to the Wireless Application Protocol (WAP) Communication standard.



**ABSTRACT**

A method, apparatus and system are disclosed. The system includes a portable wireless communication device operable with a wireless communication network. The portable device receives information from the  
5 network. The portable device can transmit to the network a request for an address from which additional information is available. The network can supply the address to the portable device, which can then transmit the address to another device.